


3" THREADED
BLIND HALF
COUPLING FOR
WIRING, WELDED
@ 180° TO THE
HANDHOLE.

#0 GAUGE
ROUND
STEEL MONOTUBE
POLE


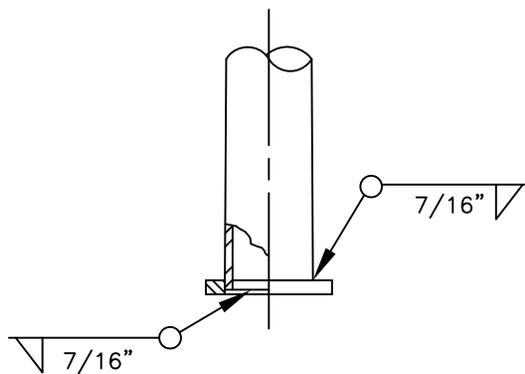


(4) 5/32" ϕ HOLES TYP.

MFG	_____
CONTRACT#	_____
POLE GA. & HEIGHT	_____
BUTT DIA.	_____
END DIA.	_____
ANCHOR BOLTS	_____ DIA. X _____ LENGTH

ALL HARDWARE SHALL BE GIVEN A FINISH POWDER COAT OF THE HAGERSTOWN GREEN, FEDERAL I.D. NO. 14066 OR "HADCO GREEN".

ALL NUTS, WASHERS, AND THE TOP 12" OF ANCHOR BOLTS SHALL BE HOT DIPPED OR MECHANICALLY GALVANIZED AND SHALL CONFORM TO A123 OR A153 FOR HARDWARE.

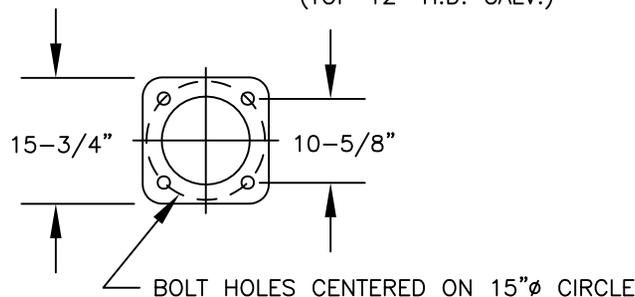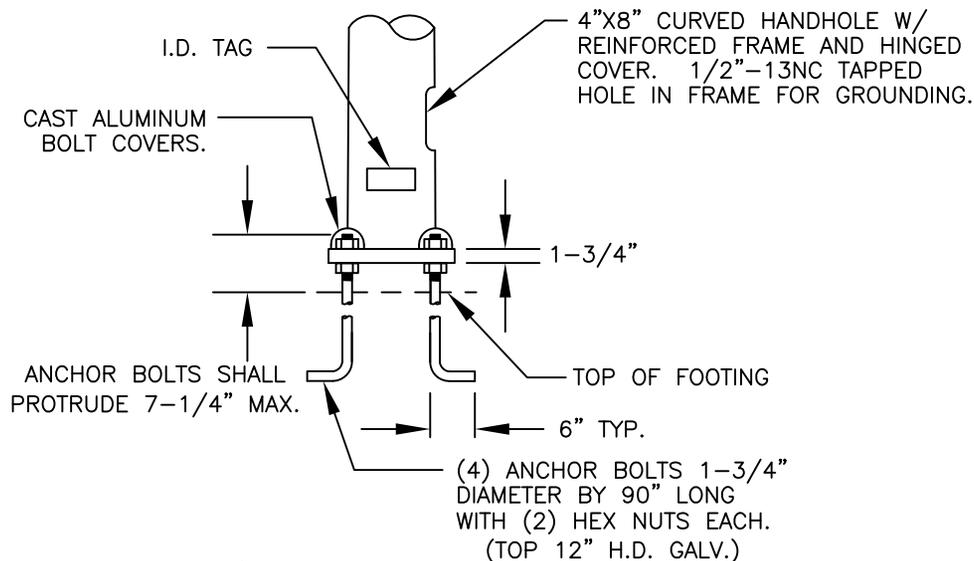

FOR ADDITIONAL DETAILS & INFORMATION REFER TO THE CITY OF HAGERSTOWN WRITTEN SPECIFICATIONS FOR STRAIN POLES, AND THE CITY OF HAGERSTOWN STANDARD PLATE TS-013 FOR POLE BASES.



CITY OF HAGERSTOWN, MARYLAND – ENGINEERING AND INSPECTIONS DEPARTMENT

TRAFFIC SIGNAL STANDARD DETAIL
STRAIN POLE

ISSUE DATE: 01-01-03

REVISIONS

Plate TS-012