



ALL NUTS, WASHERS, AND THE TOP 12" OF ANCHOR BOLTS SHALL BE HOT  
DIPPED OR MECHANICALLY GALVANIZED AND SHALL CONFORM TO A123 OR  
A153 FOR HARDWARE.

APPROXIMATELY 1/16" ALUMINUM WITH  
(15) 1/8" HOLES ON 2 SIDES, AND  
STAINLESS STEEL SHEET METAL SCREWS  
THROUGH THE OVERLAP.

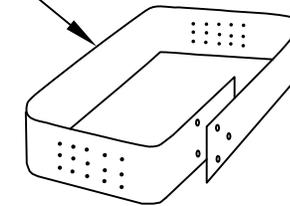


**DETAIL A**  
ALUMINUM VARMINT SCREEN

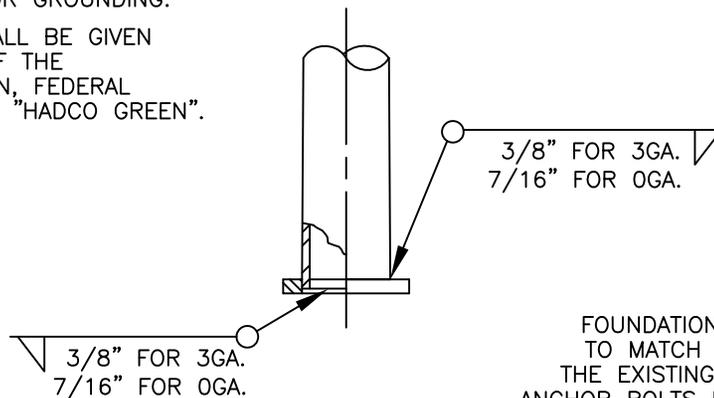

ANCHOR BOLTS SHALL  
PROTRUDE 7-1/4" MAX.

SONNOLASTIC TWO PART  
ELASTOMERIC GUN GRADE  
POLYSULFIDE SEALANT  
OR APPROVED EQUAL  
(COLOR-GREY).

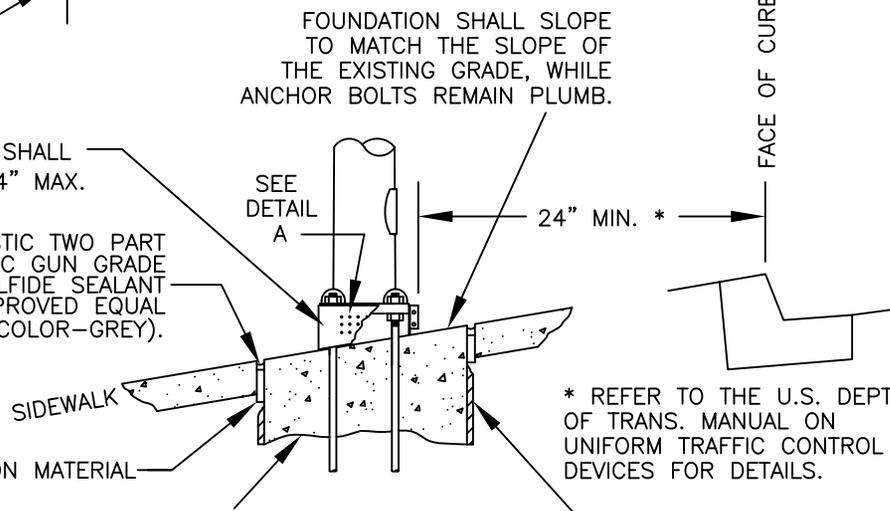

REFER TO MD DEPT. OF  
TRANS. S.H.A. STANDARD  
NO. MD - 801.01 FOR  
FOUNDATIONS.

REMOVE SONOTUBE 6"  
BELOW FINISH GRADE

REFER TO THE CITY OF HAGERSTOWN WRITTEN SPECIFICATIONS FOR TRAFFIC  
TRAFFIC SIGNAL STRAIN AND MAST ARM POLES FOR ADDITIONAL INFORMATION AND DETAILS.



CITY OF HAGERSTOWN, MARYLAND - ENGINEERING AND INSPECTIONS DEPARTMENT

TRAFFIC SIGNAL STANDARD DETAIL  
POLE BASE  
DETAILS

ISSUE DATE: 01-01-03

REVISIONS

Plate TS-013