


SIDEWALK DRAIN PLAN VIEW
NO SCALE

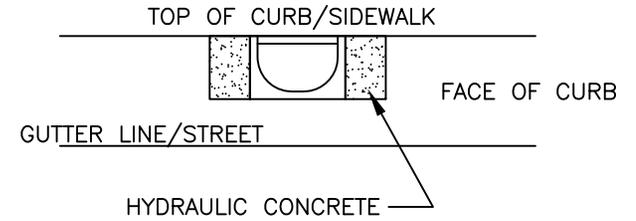

SIDEWALK DRAIN ELEVATION
NO SCALE

NOTES

1. GRATES SHALL BE INSTALLED IN THE CHANNEL AND TAPED OVER ON TOP PRIOR TO SIDEWALK CONCRETE PLACEMENT.
2. ALL THE SIDEWALK DRAIN PARTS AND FITTINGS SHALL BE CONNECTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
3. THE GRATES SHALL BE SECURED TO THE CHANNEL WITH BOLTS OR SCREWS.
4. CHANNEL DRAINS, GRATES, FITTINGS, ETC. SHALL BE SUBMITTED FOR APPROVAL BY THE CITY ENGINEER. DRAIN LOCATION AND GRADES SHALL BE APPROVED BY THE CITY ENGINEER PRIOR TO ANY SIDEWALK CONCRETE PLACEMENT.



CITY OF HAGERSTOWN, MARYLAND – ENGINEERING AND INSPECTIONS DEPARTMENT

**STORM DRAIN STANDARD DETAIL
OPEN SIDEWALK CHANNEL DRAIN
WITH REMOVABLE GRATES**

ISSUE DATE: 01-01-03

REVISIONS

-----	-----
-----	-----

Plate SD-051