



NOTES

1. STAKES SHALL BE HARDWOOD (NOMINAL 2"x2") OR HEAVY "T" STEEL POSTS OR APPROVED EQUAL. DO NOT DRIVE STAKES THROUGH THE TREE ROOT BALL.
2. "EYE" BOLT TYPE GUY ANCHORS ARE PREFERRED. SUBMIT ANCHORS FOR APPROVAL BY THE CITY ENGINEER.
3. WRAP EACH GARDEN HOSE PIECE AROUND THE TREE AND TRIM THE LENGTH WITH 2" EXTRA AT EACH END.
4. TWO STRANDS OF 12 GAUGE GALVANIZED WIRE PER ANCHOR OR STAKE MAY BE SUBSTITUTED WITH AN APPROVED EQUAL TENSION WIRES TO ALLOW 1"-3" OF TREE SWAY.
5. REMOVE ALL STAKES, ANCHORS, WIRES, HOSE, ETC. ONE YEAR AFTER PLANTING UNLESS OTHERWISE DIRECTED.




PLAN VIEW

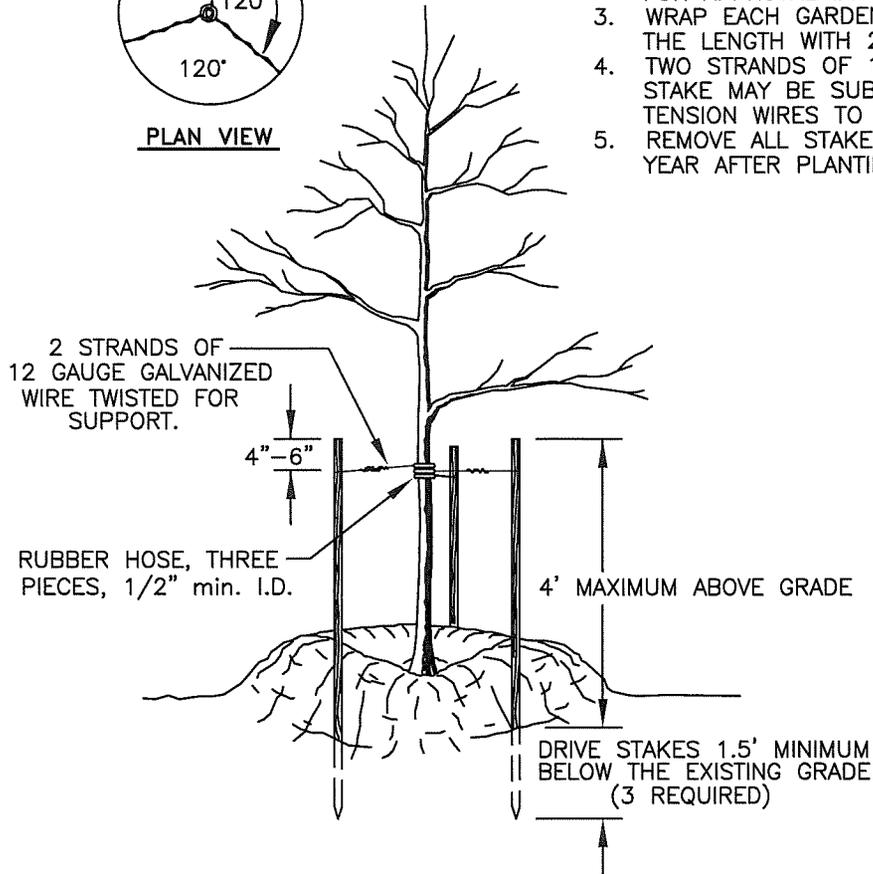


TREE WITH STAKES

2 1/2" CALIPER AND LESS



PLAN VIEW

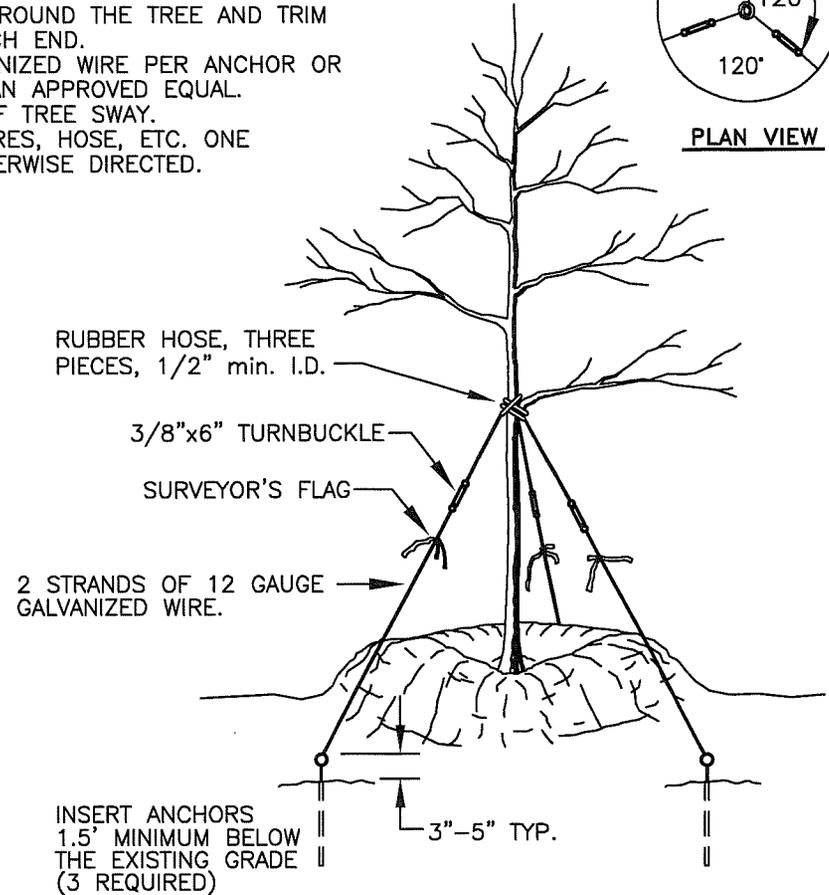

TREE WITH GUY CABLES

FOR CALIPERS GREATER THAN 2 1/2"



CITY OF HAGERSTOWN, MARYLAND - ENGINEERING DIVISION

MISCELLANEOUS STANDARD DETAIL STAKING AND GUYING TREES

ISSUE DATE: 01-01-03

REVISIONS

01-02-25

Plate **M-013**