



NOTES

1. SIGN POSTS SHALL BE 2 LBS. PER FOOT STEEL U-CHANNEL WITH 3/8" DIAMETER HOLES AT 1" ON CENTER, (SEE THE POST DETAIL). POSTS SHALL RECEIVE (1) COAT OF PRIMER AND (2) COATS OF PAINT, (RUST OLEUM NO. 769 RED PRIMER AND FEDERAL I.D. NO. 14066 GREEN FINISH COATS, OR APPROVED EQUALS).
2. THE SIGN POST LOCATION WILL PROVIDE THE REQUIRED A.D.A. "CLEAR WIDTH" IN SIDEWALK AREAS.
3. WHEN THE SIGN POST IS INSTALLED IN CONCRETE SIDEWALK, CONCRETE MEDIAN, ETC. INSTALL A 4" DIAMETER SCH 40 PVC SLEEVE WITH LENGTH TO MATCH THE CONCRETE THICKNESS (MINIMUM) AND NON-SHRINK GROUT AROUND THE POST.
4. TYPICALLY SIGNS WITH A WIDTH GREATER THAN 36" SHALL HAVE TWO POSTS. THESE POSTS SHALL BE SPACED AT 1/5 THE WIDTH FROM EACH VERTICAL EDGE.
5. STANDARD STREET NAME SIGNS SHALL BE ANODIZED FLAT SHEET ALUMINUM AS PER MD STATE HIGHWAY ADMINISTRATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION AND MATERIALS", SECTION 950.08.01 SHEET ALUMINUM SIGN PANELS. THESE SIGNS SHALL BE 9" IN HEIGHT BY 30" MINIMUM LENGTH HIGH-INTENSITY WHITE WITH HIGH-INTENSITY WHITE LETTERS. THE STREET NAME SIGN SHALL HAVE 1" RADII CORNERS AND A 1/2" HIGH-INTENSITY WHITE BORDER. A GREEN BACKGROUND SHALL BE PLACED ON TOP. LETTERS SHALL BE 6" HEIGHT FOR UPPER-CASE IN A HIGHWAY "C" TYPE FONT. EACH WORD IN THE STREET NAME SHALL BEGIN WITH AN UPPER-CASE LETTER AND THE REST OF EACH WORD SHALL BE LOWER CASE. THE WORDS STREET, AVENUE, NORTH, ETC. OR ABBREVIATIONS SHALL BEGIN WITH AN UPPER-CASE LETTER AND THE REST OF WORD SHALL BE LOWER CASE WITH NO PERIODS. FOR ADDITIONAL INFORMATION REFER TO THE U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION, "MUTCD", SECTION 2D.38 STREET NAME SIGN (D3).

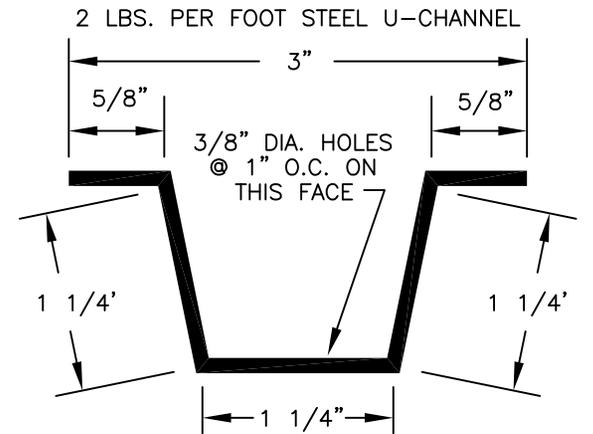

U-CHANNEL STEEL POST DETAIL

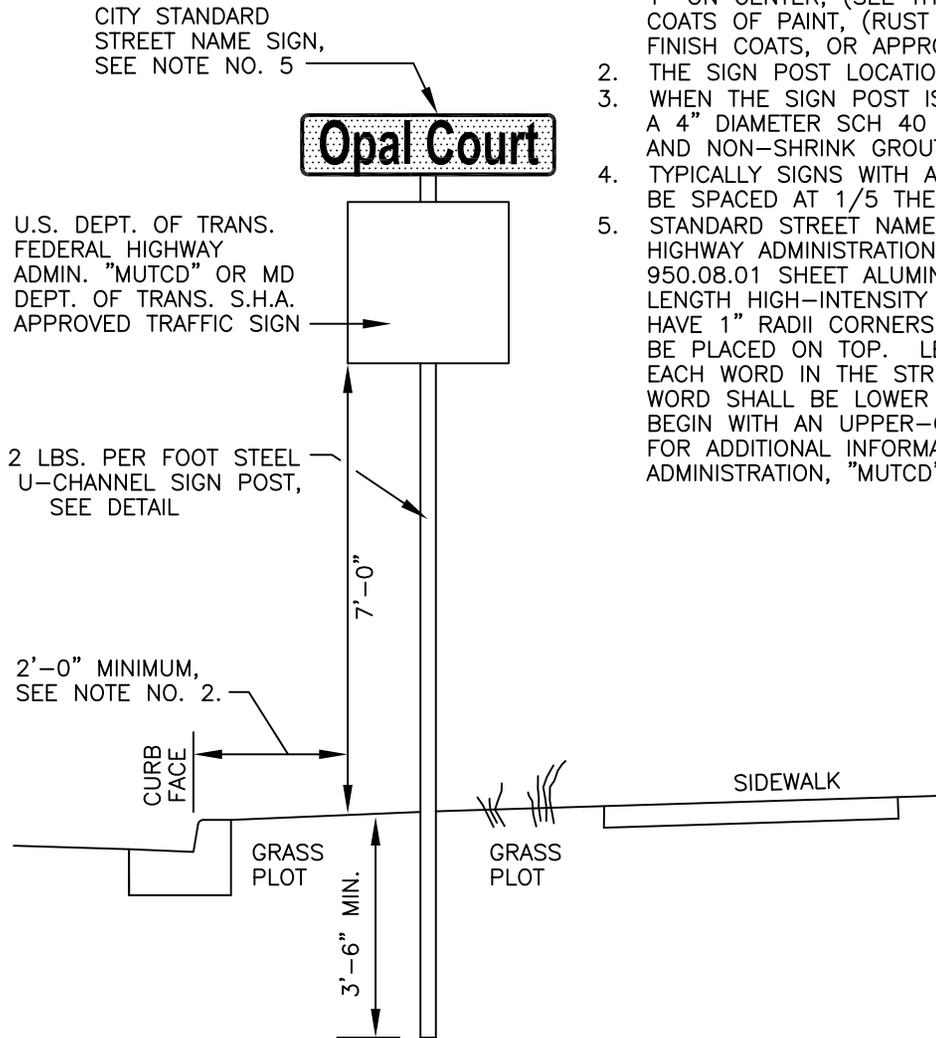

CITY OF HAGERSTOWN, MARYLAND – ENGINEERING AND INSPECTIONS DEPARTMENT

MISCELLANEOUS STANDARD DETAIL
STANDARD STREET NAME SIGN AND
TRAFFIC SIGN POST INSTALLATION

ISSUE DATE: _____	
REVISIONS	
_____	_____
_____	_____

Plate M-022