

## Definitions

An emergency escape and rescue opening is an operable window, door or similar device that provides for a means of escape and access for rescue in the event of an emergency.

## Emergency Escape Window vs. Means of Egress

Emergency escape windows do not meet the requirements for a means of egress.

## Operational Constraints

Emergency escape and rescue openings shall be operational from the inside of the room without the use of keys or tools.

Bars, grilles, grates, insect screens or similar devices are permitted to be placed over emergency escape and rescue openings provided such devices shall be releasable or removable from the inside without the a key, tool, or force greater than which is required for the normal operation of the emergency escape and rescue opening.

## Disclaimer

This publication is intended to be a guide to assist in answering general inquiries. This publication does **Not** include all aspects of the relevant code. Code requirements vary depending on numerous factors. For specific questions, please contact Code Administration.

## Permits

All work except minor repairs must be done under permit. All electrical, heating, and plumbing work should be done by licensed contractors under permit. Applications for permits may be obtained through the Code Administration Division Permits Office on the third floor of City Hall. Call 301.739.8577 x127 for complete information.

Every sleeping room must have an emergency escape and rescue opening. This opening must go to the outside of the building.

# Emergency Escape

Requirements



City of Hagerstown  
Code Administration Division  
11 Public Square, Suite 300  
Hagerstown, Maryland 21740  
301.739.8577 x103



City of Hagerstown  
Code Administration Division  
11 Public Square, Suite 300  
Hagerstown, Maryland 21740  
301.739.8577 x103

# Emergency Escape

## Emergency Escape Windows

### Minimum Height

24 inches of openable area

### Minimum Width

20 inches of openable area

### Maximum Height from Floor

44 inches above the floor


### Minimum Openable Area

5 sq. ft. if at grade

5.7 sq. ft. if above or below grade

The openable area must be obtained through normal operation of the windows.

Tilting or removal of sashes is **NOT** normal operation.

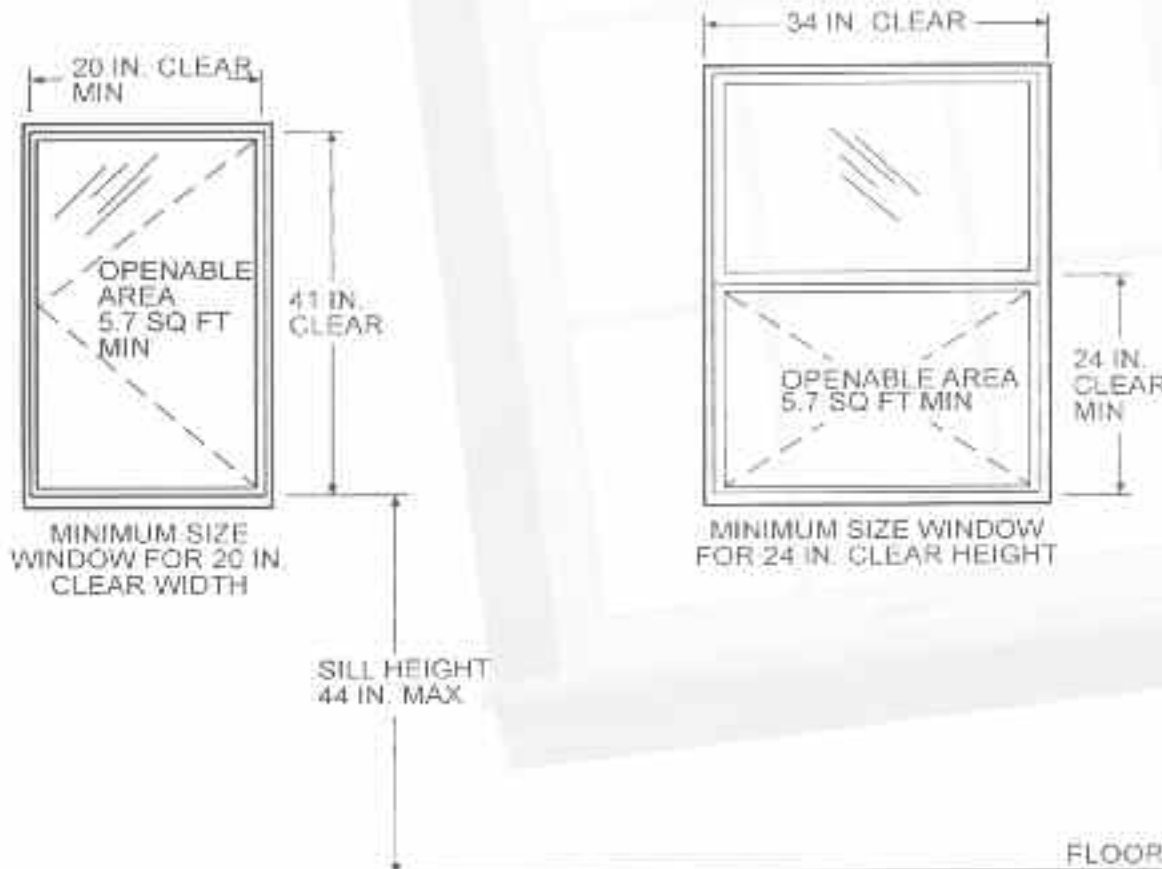


## Emergency Escape Window Wells

If the window well is over 44 inches deep, then ladders or stairs are required.

Ladders or stairs can encroach 6 inches maximum into the window well and must project at least 3 inches.

The ladders or stairs must be permanently attached and not more than 18 inches on center vertically for the steps.

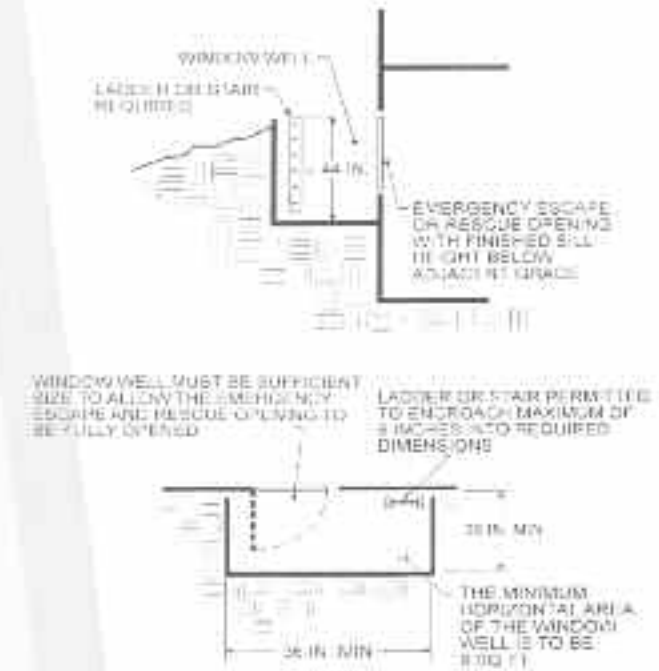

The minimum horizontal area of the window well must be 9sq. ft.

The minimum dimension is 36 inches by 36 inches.

The emergency escape and rescue opening must be allowed to open fully.