



NOTES


1. PARKING METER POST FOOTINGS SHALL BE 18" DIAMETER CIRCULAR CONCRETE AS SHOWN, MD DEPT. OF TRANS. S.H.A. MIX NO.3 (3,500 P.S.I. AT 28 DAYS) WITH 5%-8% AIR AND 2"-5" SLUMP. DO NOT ADD WATER TO THE SURFACE FOR FINISHING. FOOTING TOP EDGE SHALL HAVE 1/2" CHAMFER.
2. WHEN ADJACENT TO CONCRETE SIDEWALK, SONOTUBE OR OTHER FORM MATERIAL SHALL BE STRIPPED 6" MINIMUM FROM THE TOP OF FOOTING. 1/2" EXPANSION JOINT MATERIAL SHALL WRAP ENTIRELY AROUND THE FOOTING WITH THE TOP EDGE HELD 3/8" BELOW THE TOP OF FOOTING TO ALLOW FOR CAULKING. CAULKING SHALL BE A TWO PART ELASTOMERIC GUN GRADE POLYSULFIDE SEALANT, SONNEBORN OR EQUAL. ALSO TOOL A 1/2" CHAMFER ON THE EDGE OF THE ADJACENT SIDEWALK.
3. WHEN THE FOOTING IS IN LANDSCAPING STRIP THE TOP 6" MINIMUM OF THE SONOTUBE OR OTHER FORM MATERIAL AND SLOPE THE CONCRETE TO SHED WATER, AS SHOWN.
4. THE 50" PARKING METER POST(S) (2" DIA. GALVANIZED SCH 40 STEEL PIPE) WITH A 6" LENGTH OF NO. 4 REBAR WELDED FAST, SHALL BE SUPPLIED BY THE CITY. THE CONTRACTOR SHALL INSTALL THE POST IN THE CONCRETE FOOTING AT 37" ABOVE FINISH GRADE WITH THE CONCRETE DEPTH DETERMINED BY THE APPLICATION AS SHOWN. NO SLEEVES SHALL BE ALLOWED.
5. THE CITY SHALL FURNISH AND INSTALL THE PARKING METER HEAD(S) AND IN NO SITUATION SHALL THE CONTRACTOR TAKE CUSTODY OF THE METER HEAD(S).
6. IF A PARKING METER EXISTS AND MUST BE REMOVED AND REPLACED AS A PART OF CURB AND SIDEWALK REPLACEMENT, CALL THE PARKING METER TECHNICIAN AT CITY HALL TO MAKE ARRANGEMENTS TO HAVE THE METER HEAD REMOVED AND STORED BY THE CITY TECHNICIAN (CALL AGAIN TO ARRANGE REPLACING OF THE METER HEAD).

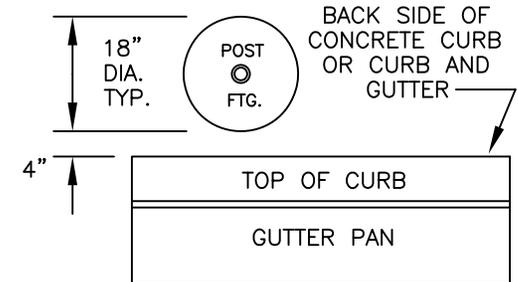


LOCATION PLAN

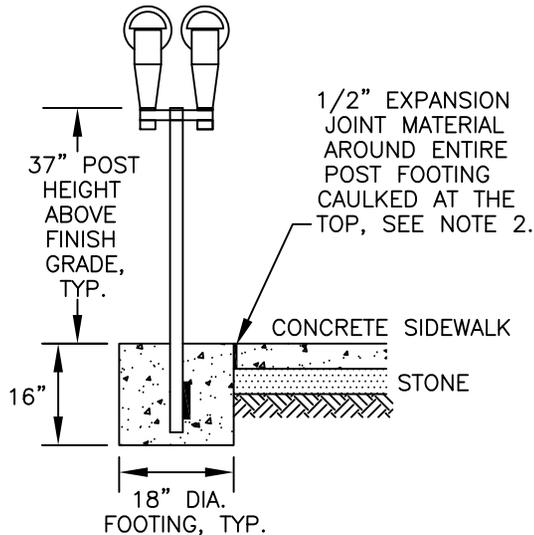


**PARKING METER
IN CONCRETE SIDEWALK**

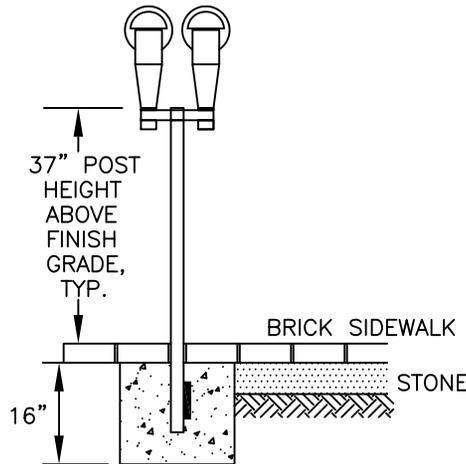

**PARKING METER
IN BRICK SIDEWALK**

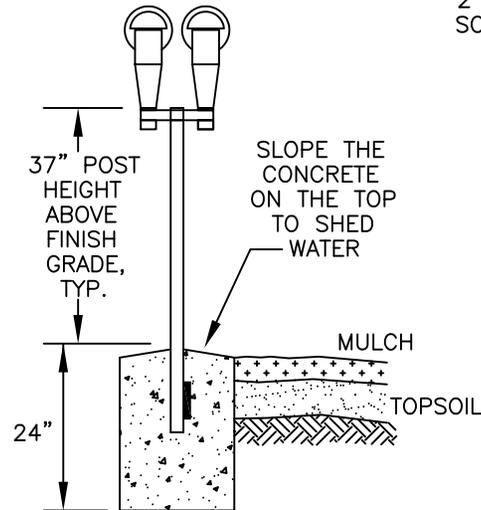

**PARKING METER
IN LANDSCAPING**

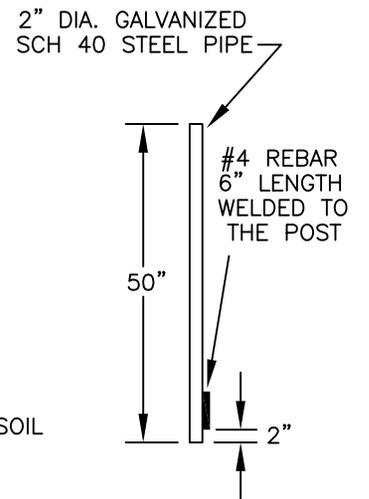

**STANDARD STEEL
PARKING METER POST
(SUPPLIED BY THE CITY)**



CITY OF HAGERSTOWN, MARYLAND – ENGINEERING AND INSPECTIONS DEPARTMENT

**MISCELLANEOUS STANDARD DETAILS
PARKING METER FOOTING
AND POST INSTALLATION**

ISSUE DATE: 01-01-03

REVISIONS

| | |
|----------|-------|
| 01-01-07 | _____ |
| _____ | _____ |

Plate M-021